



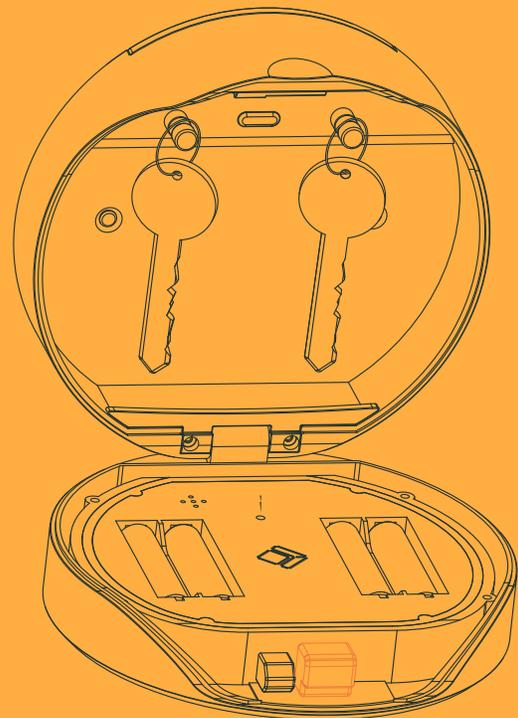


Smart-Box User Guide

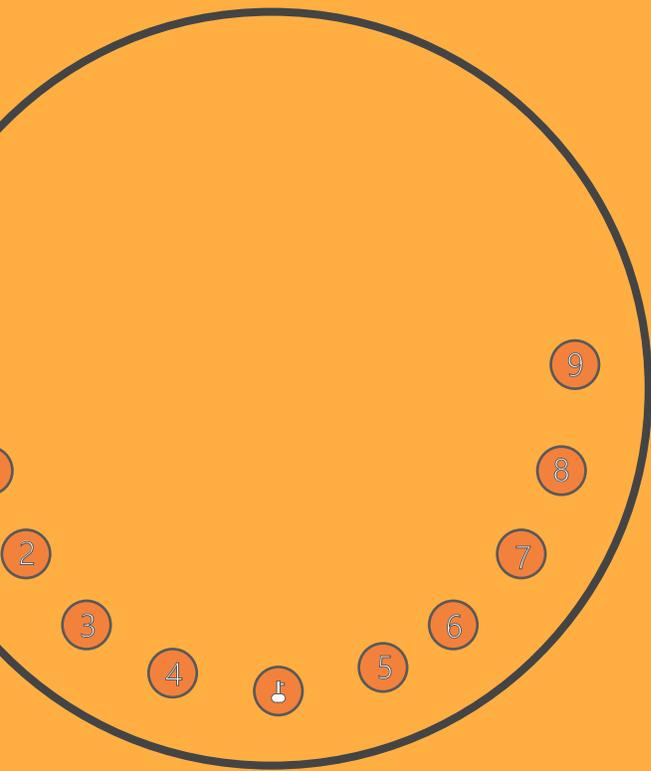

Secure Solutions For Protecting Your Keys

www.keyboxsystems.com

Smart-Box KB 12 User Guide

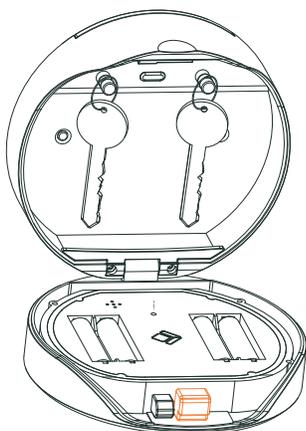

What's Included With The Smart-Box KB 12



1 x KB 12 Smart-Box Key Storage Unit




Or 1 x KB 12Plus Smart-Box Key Storage Unit with Shackle (Selectable Purchased)



2 x Mounting Screws



2 x Screws Anchors



1 x Mounting Sticker

Specifications

Model: K12

Material: Body Zinc Alloy, SUS304 4


Battery: x AAA Alkaline Battery

Unlock Mechanism: Bluetooth, PIN Code, App

Jump Start: USB-C




Front

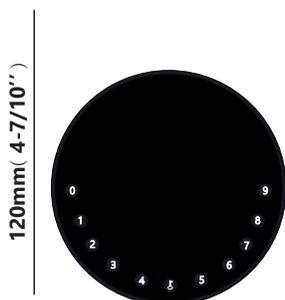


120mm (4-7/10")

Inside



Depth
22mm (4/5")

Back



120mm (4-7/10")

120mm (4- 7/10")

120mm (4- 7/10")

Features

Lock & Unlock

- 
Administrator Unlock
 Set a Master Administrator PIN for unlocking, settings, operations etc. and only the administrator could change the administrator PIN code.
- 
Anti-Peeping
 Add up to 8 - 2 digits before and after PI code to intensify your PINs.

Mobile Control

- 
Bluetooth one-touch unlock
 With your Mobile you could unlock the Smart-Box by touching the Unlock key on the App.
- 
Mobile Administrator
 Set Administrator PIN Codes from your Mobile to unlock, add users, delete users, etc.

Battery

- 
Battery life
 4 AAA batteries, the life cycle will be more than 12 months, please use high quality batteries.

Quick Mounting

Step 1>Install Battery Please remove the (4) screws on the battery cover plate then put 4 AAA batteries into the battery dock properly and put the plate back with screws.

- 
User Unlock
 This Smart-Box allows to add up to 100 user PIN codes for your family, friends and visitors.

- 
Auto Locking
 If there is no opening motions in 10 seconds the box will be automatically locked.


- 
Dynamic Password Unlock
 You could generate dynamic PIN through mobile App, for scheduled access, parcel delivery, house keeping, etc.

- 
Low Battery
 When the battery runs out of power, system will remind you to replace the batteries.

- 
System Lockdown
 The lock will be lockdown for 5 minutes if continuously enter wrong PINs for 5 times.


Emergency

- 
Jump Start
 When the power is down and use USB-C to jump start the lock and get it unlocked

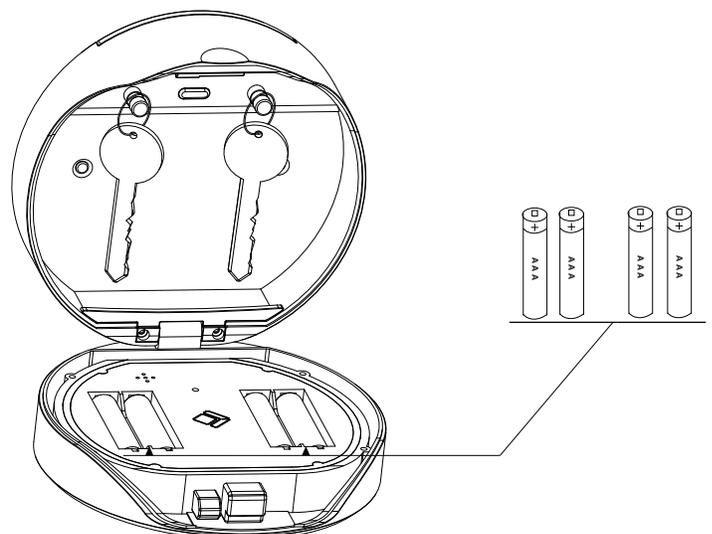

Step 2>Wall Mounting


There are 2 screw holes on the Smart-Box and use the screws and the screw anchors in the package to fix the Smart-Box

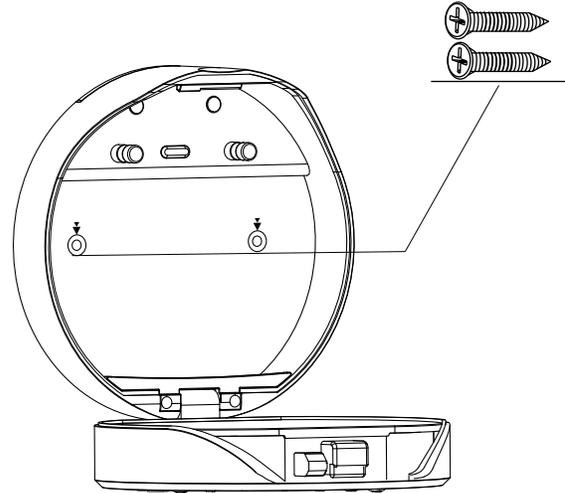

Ei jW`GYh d

Step 12>U]nY`Smart-Box` jZfYei jfYX

>The Smart-Box was initialized from factory already, if need it to be initialized please follow the steps below.

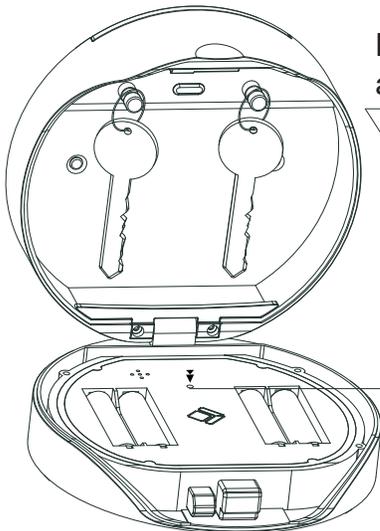

Please remove the battery plate to Initialize the Smart-Box and find the reset button hole on the battery dock.

Press and hold the Reset Button for 5 beeps

Smart-Box will be initialized with a long beep right after

Step 2>Mobile App Paring


>1. Please scan QR Codes below and download the App, Scan any one you like.




>2. Run App from your Mobile phone, and make sure your Mobile Bluetooth is on.

>3. Keep Mobile Bluetooth on and back to the Smart-Box then Press the “Reset ” button one time only and Blue led light on(Enter Button) .

>4. Once you see the Blue LED on you need to Key in Administrator password(123456) then press “Enter Button” and start paring(Picture Below)

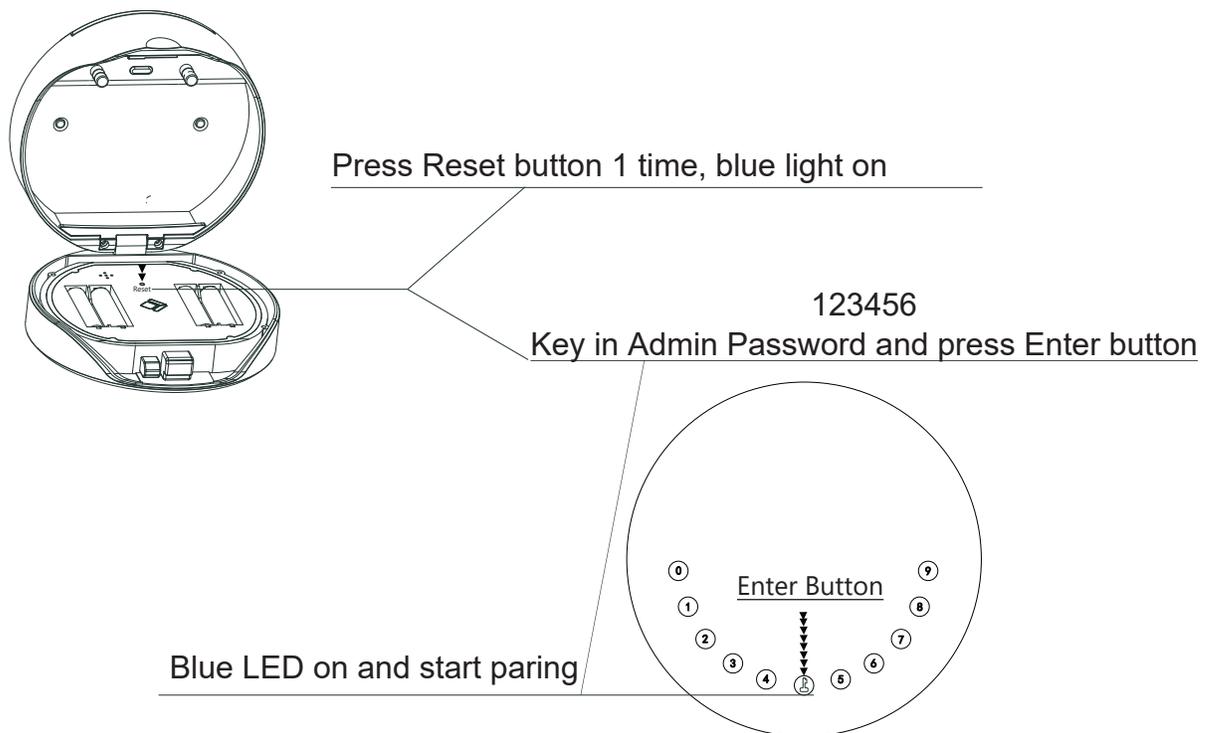


>5. Right after you pressed the “Enter Button” Tap “Add device” on your App and you will see the auto-detected smart Smart-Box, Please check the detail operations below:

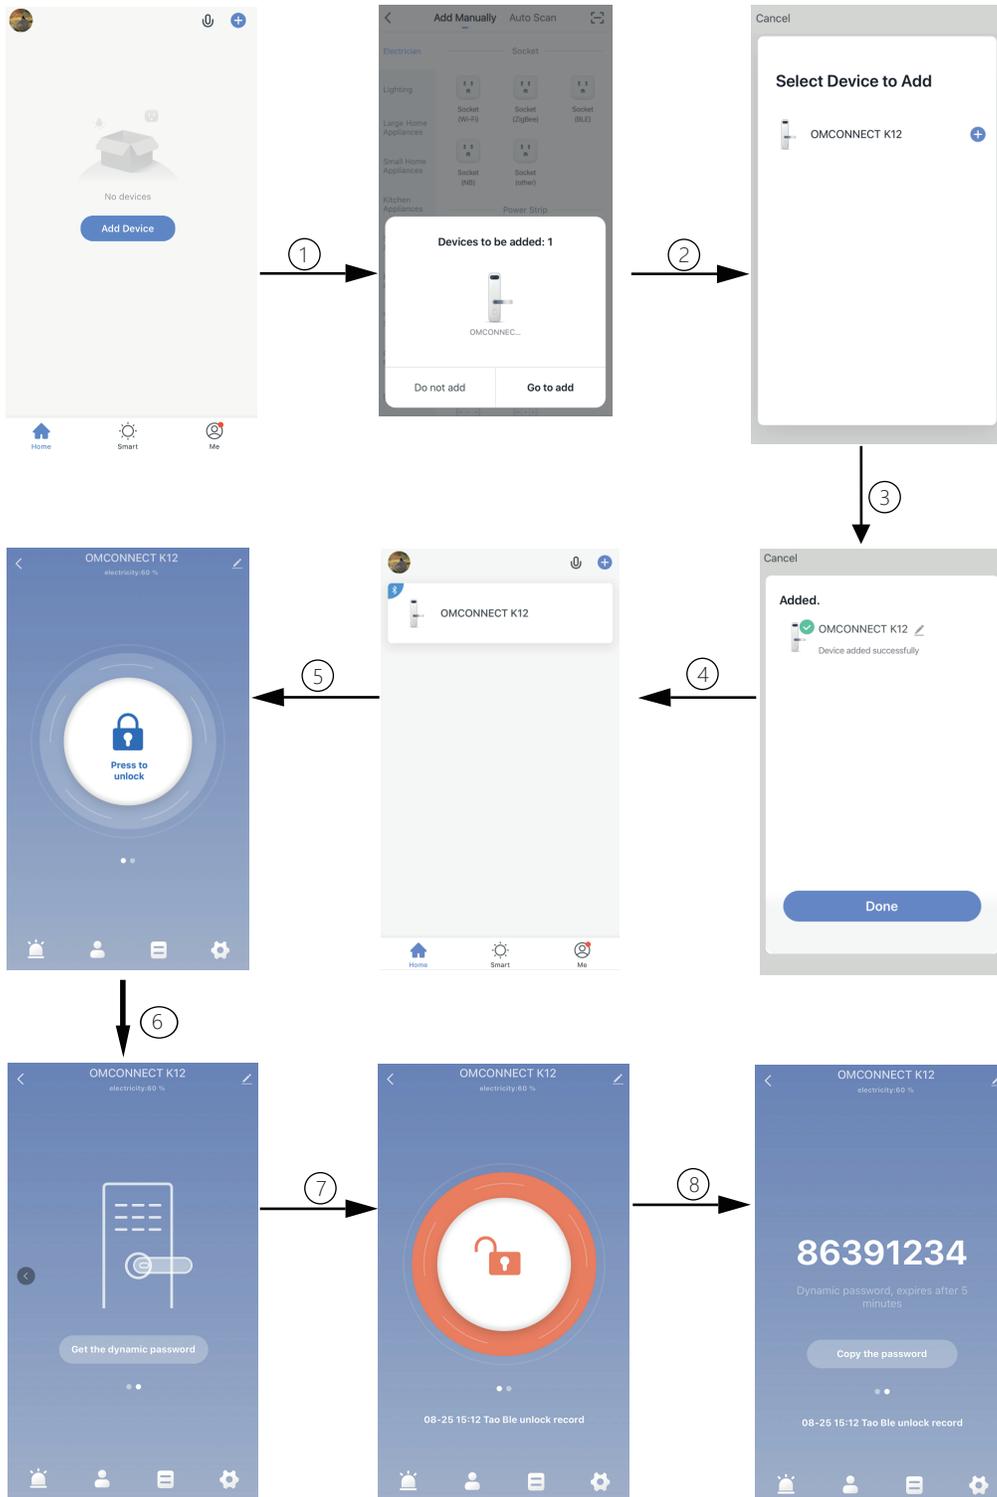


Step 3>Add Administrator Password(Under Initialized Mode)

- >1. Long press the Enter Button for 3 seconds.
- >2. Key in new password(more than 4 digits).
- >>>3.Press Enter Button in the middle to confirm the password.
- >>>>4.Key in the new password again and press Enter Button to complete

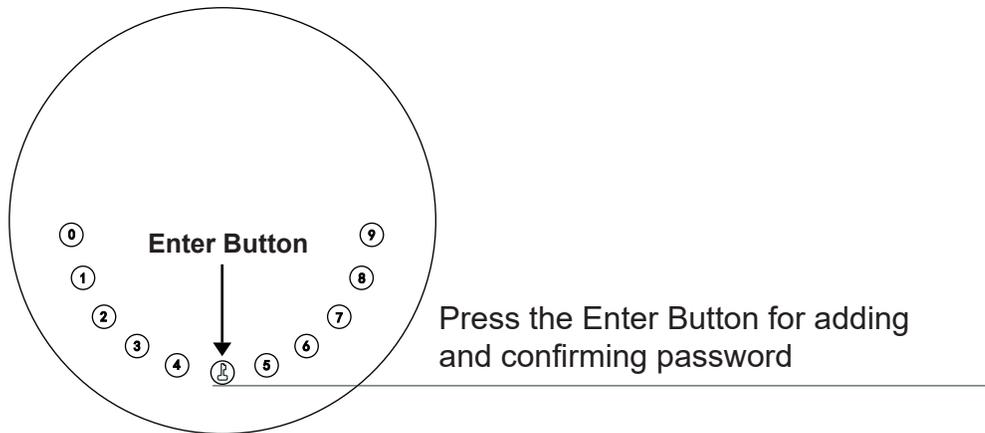


Step 4>Add User Password

- >1. Press the Enter Button for 3 seconds
- >2. Key in Administrator password and press Enter to get Verified
- >>>3. Then Key in new user password and press Enter Button
- >>>>4. Key in the same user password again and press Enter Button to complete setting

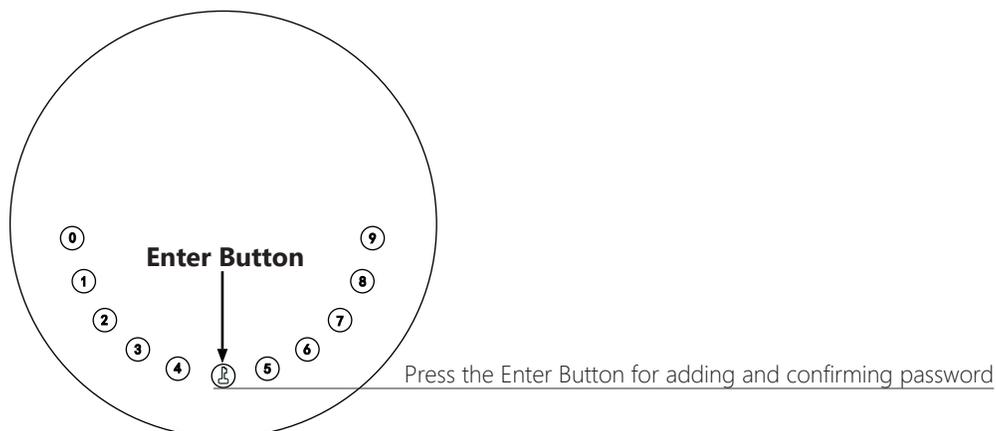

Step 5>Testing


- >1. Unlock the Smart-Box with Administrator Password.
- >2. Unlock the Smart-Box with User Password.
- >>>3. Lock the Smart-Box by closing back the front assembly, motor rolls up and locked >>>>4. if everything worked well then move to Mobile control.

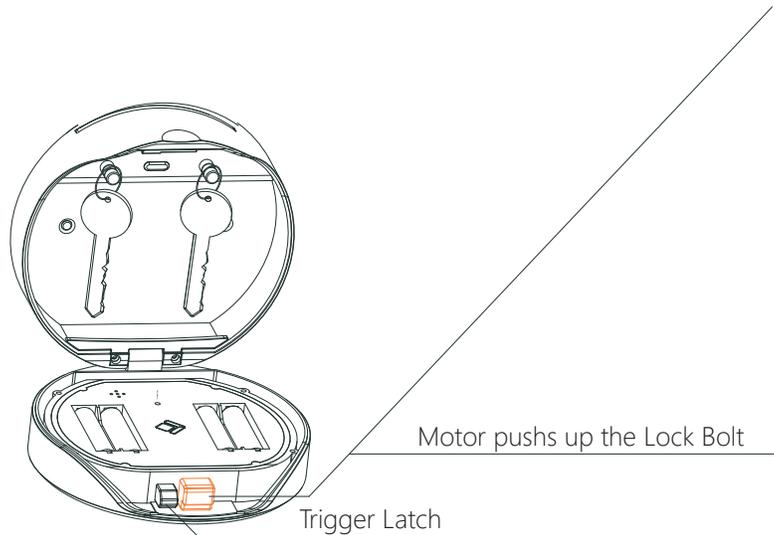

Manage Users

Change User Password

- > 1. Press Ⓜ Ⓜ Administrator Password+ Ⓜ Password to be Changed+ Ⓜ
- > 2. Enter New Password to be set + Ⓜ New Password again + Ⓜ to finish the setting.

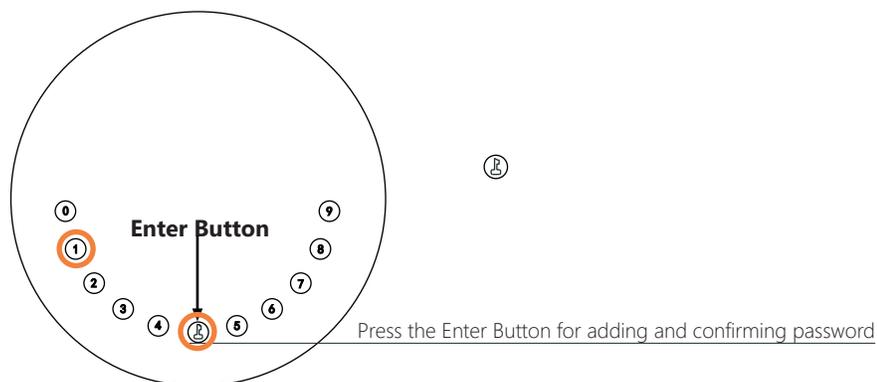

Delete User Password

- >1. Press Ⓜ 2 Ⓜ +Administrator Password+ Ⓜ + User Password to be deleted+ Ⓜ

Delete All Passwords

- >1. Press Ⓜ +00000+ Ⓜ +Administrator Password+ Ⓜ


Tips

Sounds & Lights :

- >1. Press any Button -----"Beep with green on the enter button" .
- >2. Successfully added passwords and correct password -----Green flashes with sound "
- >3. Improper operations and wrong passwords-----3 red flashes with sound"
- >4. Sleep Mode-----"Breathing blue light" on Enter button.
- >5. Awaiting Operating Mode-----Bule light flashes.
- >6. Operating Mode-----Bule light on.
- >7. Battery Low-----"Red flashes with sound when unlocked".
- >8. App Paring Mode-----"Green light on 1 second with Beep Sound"

Anti-peeping:

Add digits before and after the password, make the password mixed up with random digits to protect your password.

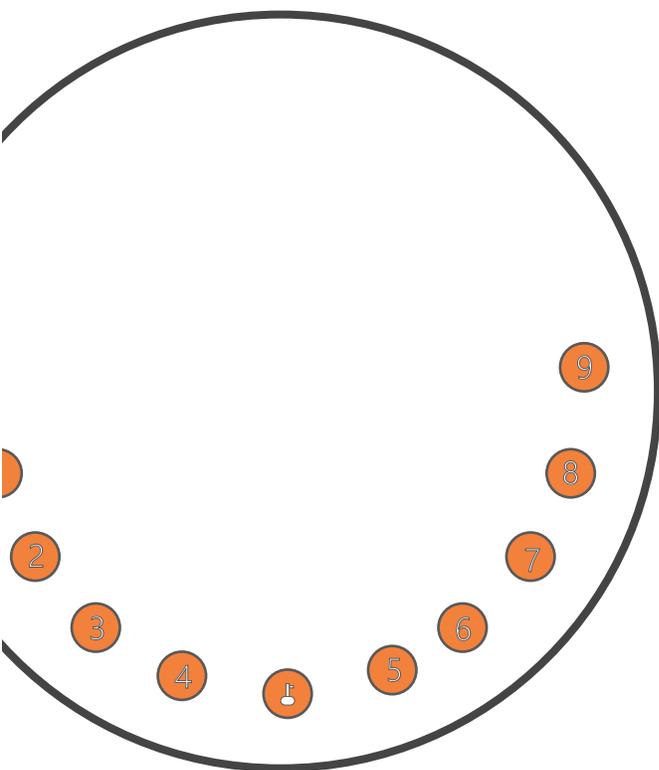

Smart-Box Innovation Key Storage Solutions

For Information Please Contact US



Distributed/Supported in North America by
Time Access Systems Inc
 Phone (604) 460-8670 Toll Free 1-877-460-9602
www.keyboxsystems.com

